

Model: RA-128

Waterproof standalone control

1. Large capacity, Can support 15,000 Users.
2. Metal shell with IP65 waterproof protection,
3. 125KHz or 13.56MHz Frequency

Advantages:

Use User Management card to Programming, Easy Operation (Optional Remote control)

Large capacity, Can support 15,000 Users.


Metal shell with IP65 waterproof protection, can use outdoor Adopt function steady card reader of blocks

Optional RS485 communication, Can real-time management user card and check records

Specification:

Model No.	RA-128
Working frequency	125khz or 13.56mhz
User capacity:	15,000 users
Standard interface	Wiegand26 input, Optional RS485
Work Voltage:	DC 12V±10%
Operating current:	< 100mA
Reading Range:	1~15cm
Waterproof degree:	IP65 rating
Ambient Temperature:	0~60 Degree
Ambient Humidity:	20%~80%
Electricity lock output:	≤3A
Alarm output:	≤20A
Output short circuit protection time:	≤100μS

Output short circuit protection time:	≤100μS
Open time:	0 ~ 99 seconds (adjustable)
Size:	128(L) x 85(W) x 22(H) mm

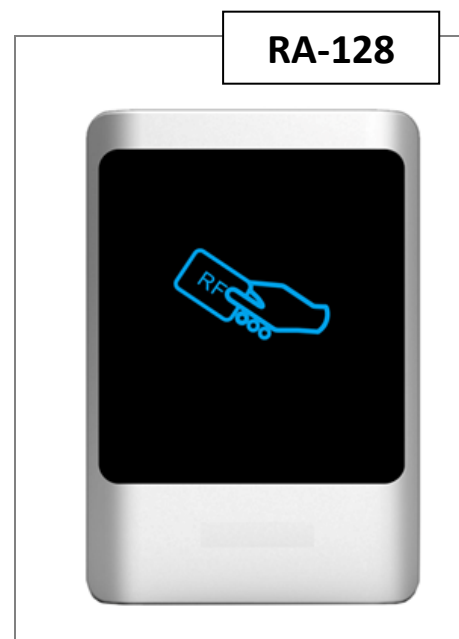

WIEGAND PERIFERIJE - RFID ČITAČ

Najsavremenija tehnologija u funkciji kontrole pristupa, ljudi i vozila.



Phone: +381 11 3557 599

office@aspekt.rs